

1/2" SHEATHING
 AIR BARRIER
 2x6 STUDS @ 16" o.c.
 R20 BATT INSULATION
 6 MIL POLY VAPOR BARRIER
 1/2" GYPSUM BOARD

STEEL ANGLE LINTEL

SEALANT AND BACKER ROD


FACE BRICK BEYOND

SEALANT AND BACKER ROD


PRECAST SILL W/ DRIP

TYPICAL 2X6 BRICK EXTERIOR WALL:

FACE BRICK
 GALVANIZED METAL BRICK TIES
 1" AIR SPACE
 1/2" SHEATHING
 AIR BARRIER
 2x6 STUDS @ 16" o.c.
 R20 BATT INSULATION
 6 MIL POLY VAPOR BARRIER
 1/2" GYPSUM BOARD

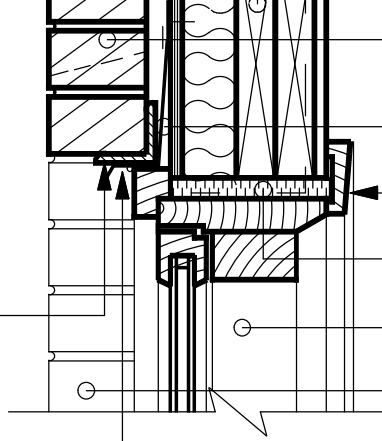

WEEP VENTS EVERY 3RD BRICK
 AT BOTTOM
 METAL FLASHING
 INTERIOR CASING
 SHIMS AND INSULATION
 WINDOW UNIT
 FACE BRICK BEYOND

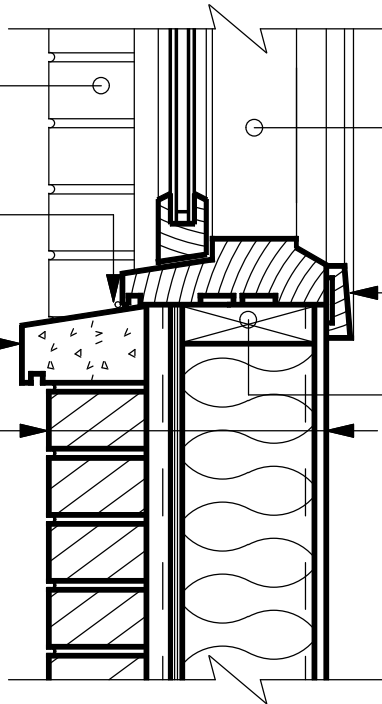

WINDOW UNIT
 INTERIOR CASING
 2X6 SILL PLATE

EDUCATIONAL COPY
 SOFTPLAN
 ARCHITECTURAL DESIGN SOFTWARE

2X6/BRICK HEADER & SILL

SECTION DETAILS